




# Video terminal conference control flat panel

## TV-HK10

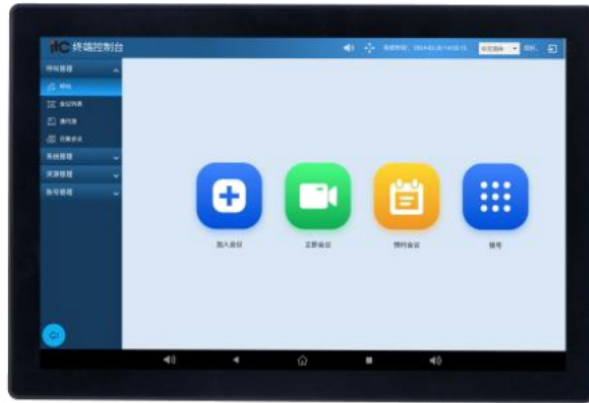

### Feature

- \*It has a 10.1-inch capacitive screen, built-in Android 9.0 system, built-in video conference software control application, and supports the control of conference or video conference terminals.
- \*Supports functions such as address book, joining a meeting, scheduling a meeting, immediate meeting, dialing/hanging up, inviting people to join a meeting, setting screen layout, mute, camera control, applying for and releasing the chairman, applying to speak, and viewing media information.
- \*Built-in wireless WiFi module supports wireless access to the network .
- \*With multi-angle adjustment bracket and also supports wall-mounted installation .
- \*Supports USB 5V, PoE and other power supply methods.

### Specification

Operating system	Android 9.0
Processor (CPU)	Six cores, 4xCortex A73+2xCortex A53
Graphics Processing Unit (GPU)	ARM G52 MP4(6EE), supports OpenGL ES 3.2, Vulkan 1.1, OpenCL 2.0
Memory	4G RAM+16GB ROM
Video codec	Encoder:H.264/H.265 1080P60 ; Decoder: VP9 Profile-2/ H.265 HEVC MP-10@L5.1 / ; AVS2-P2 Profile 4Kx2K@60fps ; H.264 AVC HP@L5.1 4Kx2K@ 30fps ; H.264 MVC 1080P@60fps
WIFI standard	IEEE802.11a/b/g/n/ac,WPA,WPA2
Touch screen size	10.1-inch IPS touch screen
Bluetooth	Bluetooth 5.0
Touch screen touch	Support 10-point touch
Touch screen resolution	1920×1200
Screen brightness	300cd/m <sup>2</sup> (typ)
Touch screen viewing angle	170 degrees
Standard interface	1 × USB2.0 Type-C , 1 × USB2.0 Type-A , 1 × RJ45: 10/100 Base-T
Built-in speaker	1 × 1.2W
Built-in microphone	Pickup distance up to 2 meters
Dimensions ( L×W×H )	243mm × 164mm × 33mm
Net weight	0.8076Kg
Maximum power consumption	15W
Relative temperature	0°C ~ 40°C (working state), -40°C ~ 70°C (non-working state)
Relative humidity	10% ~ 80% (working status), 0% ~ 95% (non-working status)
Ambient noise	Less than 46dBA SPL