

**itC** **T-6236**  
**LECTERN**



**INTELLECTIVE PUBLIC ADDRESS SYSTEM**


---

# [LECTERN AMPLIFIER INSTRUCTION MANUAL]

## 1 Installation

---


- 1 Screw out four screws from the bottom of the column speaker, and then connect the bottom with the speaker and install well.
- 2 Use screws to connect the MIC, make sure the Lectern can work.
- 3 Screw out the four screws from the top of the speaker, then connect U shape bracket with column speaker then fix them.
- 4 Connect the panel with the U shape bracket and fix them.

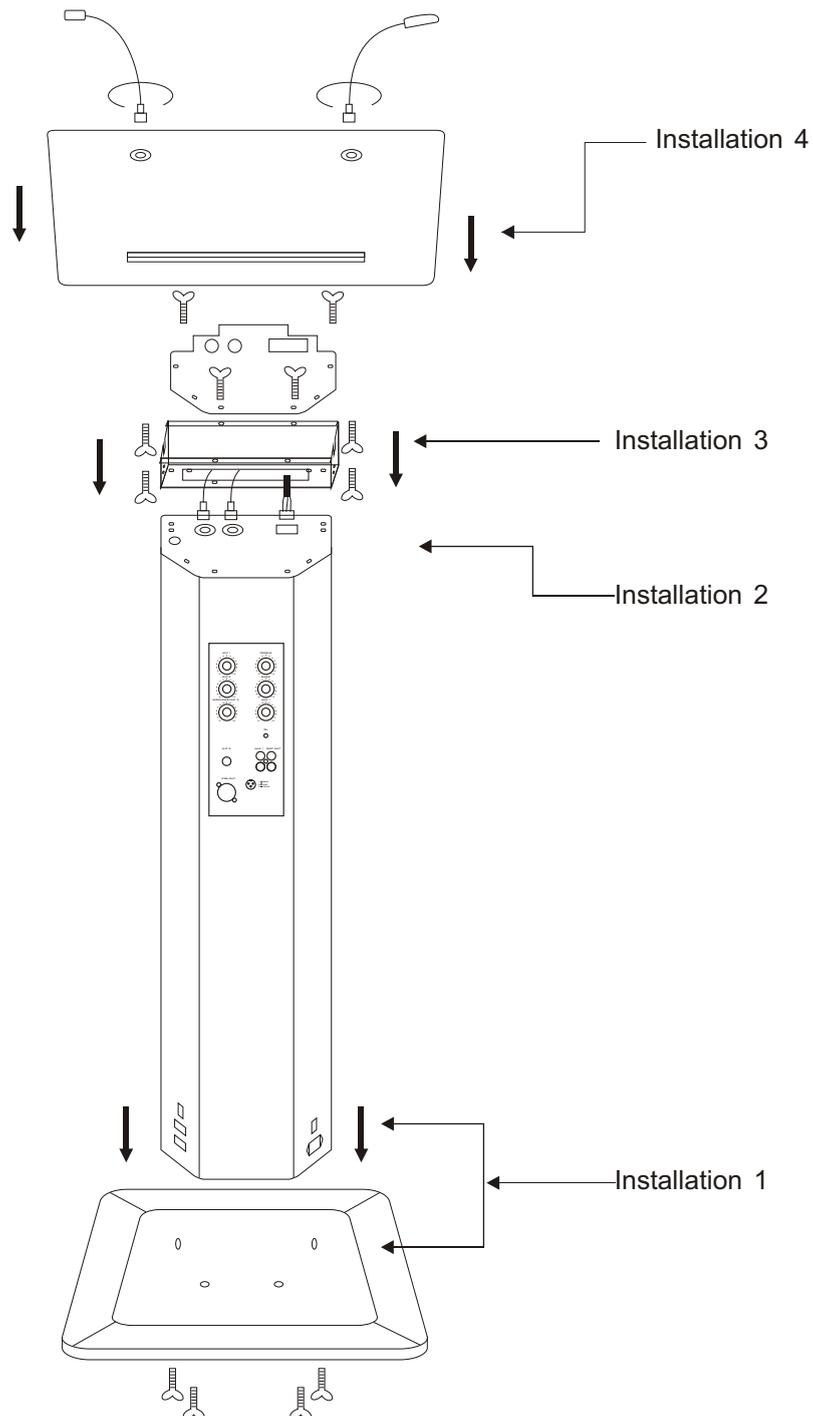

# [LECTERN AMPLIFIER USE MANUAL]


## 1 FEATURES

- 1 4R output port
- 2 1 AUX input , Independent control
- 3 Short-circuit,clipping and high-temp protection
- 4 Bass, Treble volume control
- 5 24V phantom power
- 6 1 line balance output
- 7 1 recording output
- 8 2 MIC input, Independent control. MIC 1 capacitive microphone,  
MIC 2 handheld microphone.

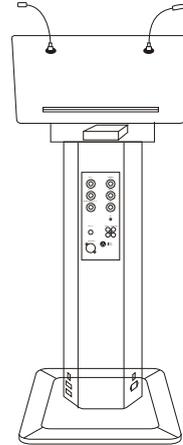

## 2 PRODUCT STRUCTURE INSTRUCTION

- |                         |  |
|-------------------------|--|
| 1 Goose neck MIC        | 12 power instruction                   |
| 2 Lamp indicator        | 13 Voice input                         |
| 3 Light Switch          | 14 Recording output.                   |
| 4 Panel                 | 15 Pre-Amp output                      |
| 5 Wireless MIC receiver | 16 MIC 2 input                         |
| 6 MIC1 volume control   | 17 Power switch                        |
| 7 MIC2 volume control   | 18 Power input                         |
| 8 Reservation jack      | 19 Selection switch of speaker output. |
| 9 Treble control        | 20 Left channel)                       |
| 10 Bass control         | 21 Right Channel)                      |
| 11 AUX 1 volume control | 22 Bottom                              |

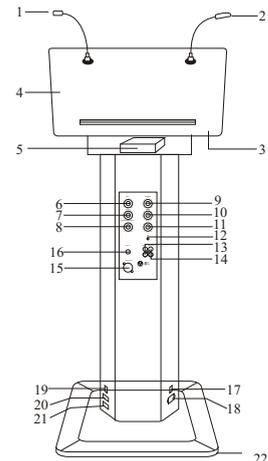

## 3 SPECIFICATIONS

Item	Type NO	LECTERN AMPLIFIER			
AC power source		<input type="checkbox"/> ~110V 50Hz	<input type="checkbox"/> ~110V 60Hz	<input type="checkbox"/> ~120V 50Hz	<input type="checkbox"/> ~120V 60Hz
		<input type="checkbox"/> ~220V 50Hz	<input type="checkbox"/> ~220V 60Hz	<input type="checkbox"/> ~230V 50Hz	<input type="checkbox"/> ~230V 60Hz
		<input type="checkbox"/> ~240V 50Hz	<input type="checkbox"/> ~240V 60Hz	<input type="checkbox"/> ~220-240V 50-60Hz	<input type="checkbox"/> ~240V 60Hz
Consumption power		100W			
Frequency response		100Hz~16KHz			
T.H.D rate		Below 0.5%			
Output power		60W			
Sensitivity		Input	Balances output	Recording output	Amplifier output
	AUX 1	350mV	1V±20mV	200mV±20mV	13.5V±0.5V
	MIC 1	12mV	1V±20mV	200mV±20mV	13.5V±0.5V
	MIC 2	7mV	1V±20mV	200mV±20mV	13.5V±0.5V
(S / N)signal noise ratio		Above 65dB			
Pre output		1V / 0dB			
Audio control		Bass:±10dB / Treble:±10dB			
Dimension		580(L) × 420(W) × 1100(H)mm			



**itC**