




Serial Port Splitter

Embedded software: HD matrix input card embedded software V4.40
TS-9232

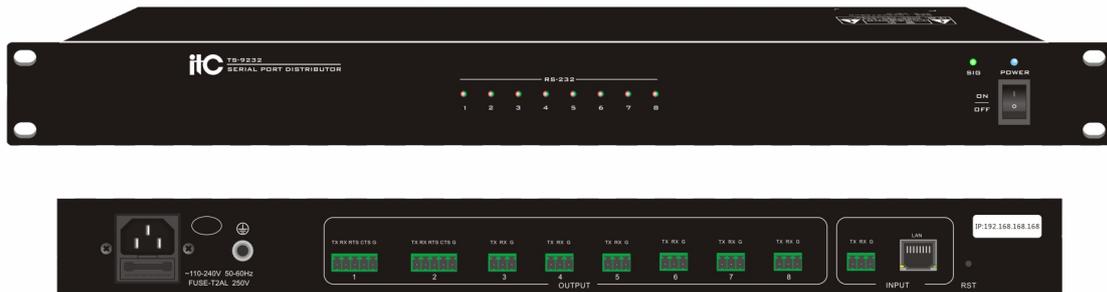

Feature:

- * 1 RS-232 serial port input, 8 RS-232 serial port outputs.
- * Input data can be assigned to switch to any of the 8 outputs.
- * The baud rate and check mode of the output data can be set.
- * With 1 network interface, it supports remote control through the network.
- * Through the panel indicators, you can clearly observe the operation of the port.
- * Used with high-end central control, the cost of control ports can be saved.
- * Use low-voltage power supply, safe and reliable.
- * Standard 19-inch cabinet installation, 1U height.
- * With a reset button, it supports restoring to the factory default settings.

Specifications:

Model	TS-9232
RS-232 interface	3 PIN header ; Baud rate: 9600, Data bit: 8, Stop bit: 1, Check bit: None.
Network interface	RJ-45, 100M
Power supply	110V~240V 50~60Hz
Total power consumption	3W
Installation method	Standard rack mounted installation
Dimension	484×245×44mm (L×W×H)
Weight	1.2Kg