




### Schematic Diagram Of Type 2

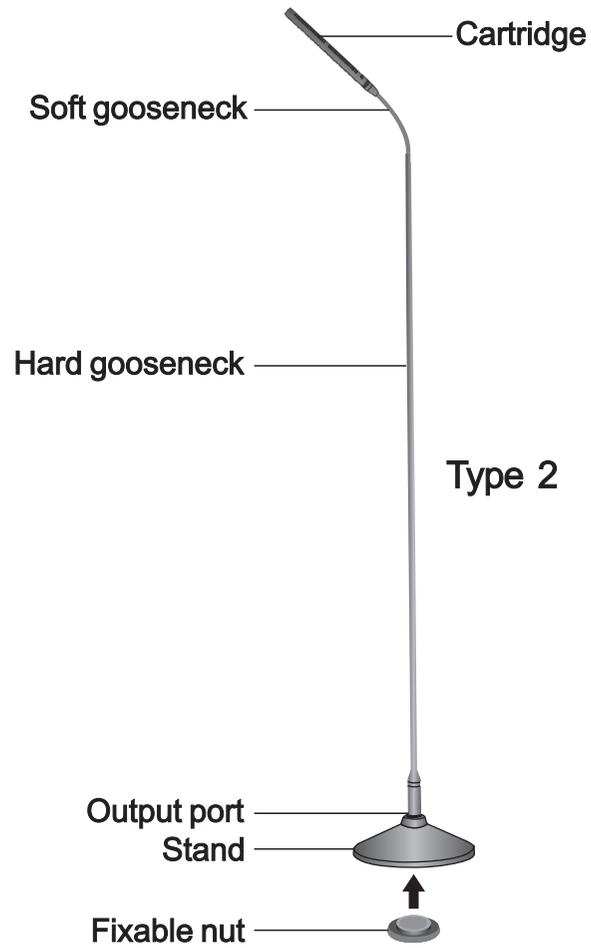

### Frequency Response Curve Graph

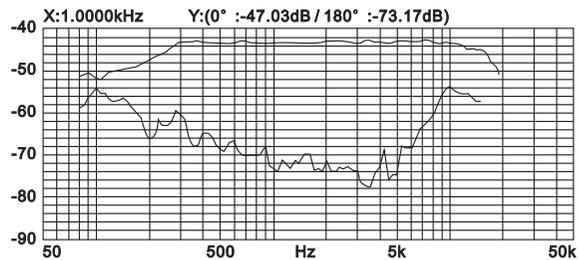

# PROFESSIONAL MEETING MICROPHONE SERIES

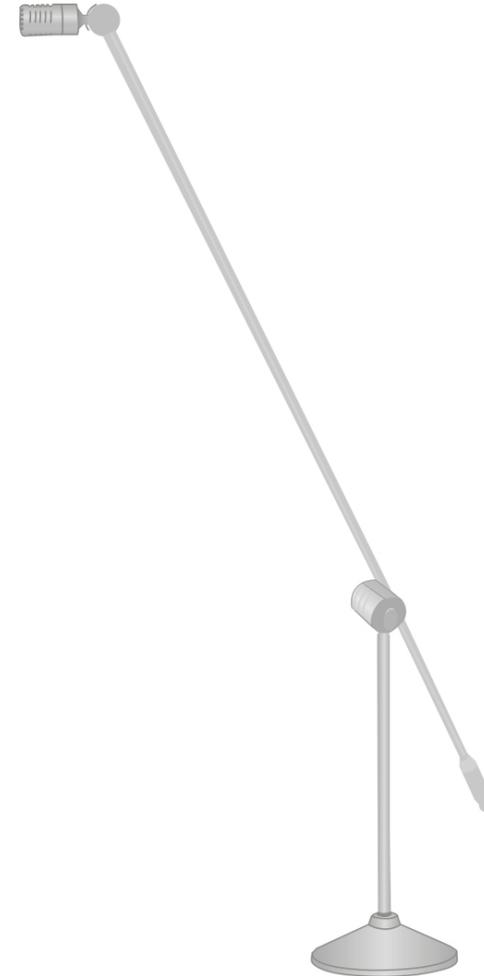

**INSTRUCTION MANUAL**

**PLEASE READ THE MANUAL CAREFULLY BEFORE USING**

## Main Features

This product is specially designed and made for various kinds of meeting, lectures, broadcasting, recording occasion and etc. This series of products are on productions experience foundation, which our factory has accumulated for many years. The microphone cartridge adopt high-quality cardioid condenser, and design the acoustics structure of the sound head meticulously, therefore it has the fine frequency and direction. It's designed by rational electricity and acoustics, choose various kinds of high-quality components and adopted the advanced craft.

## Parameter

Model No.	Type 1	Type 2	Type 3
Capsule Type	Condenser	Condenser	Dual-Condenser
Frequency Response	30Hz-16kHz	30Hz-16kHz	30Hz-18kHz
Polar Pattern	Hypercardioid	Hypercardioid	Hypercardioid
Output Impedance(Ohm)	75-Balanced	75-Balanced	75-Balanced, 200-UnBalanced
Sensitivity ( $\pm 2$ dB)	-43dB	-43dB	-43dB
Power Supply	Phantom 48V	Phantom 48V	Phantom 48V

## Packing Detail

- |  |             |
|--|-------------|
| 1. Microphone (include microphone cartridge, gooseneck, bracket and stand) | 1 set       |
| 2. Interconnection cable 20M   | 1 piece     |
| 3. Manual  | 1 piece     |
| 4. Guarantee Card  | 1 piece     |
| 5. Microphone sponge   | 1 / 2 piece |

## Connection



## Schematic Diagram Of Type 1 & 3

